


AN-10034E

Framing Nailers

34 Degree Strip Framing Nailer



AN-10034E

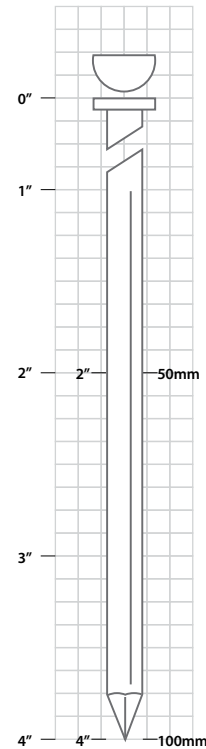

Features

- 360° Adjustable Air Deflector
- Depth-Of-Drive Adjustment
- Toe-Nailing Teeth For Slip-Free Grip
- No-Mar Rubber Tip
- Sequential Fire Trigger Available (#25205301A)

Applications

- Framing
- Sub flooring
- Sheathing
- Crating

Fasteners

- 34°D Head Paper Tape Collated Strip Nails
- \varnothing .113 - .161" / 2.87 - 4.1mm

Tool Specifications

Weight	Dimensions (L x W x H)	Operating Pressure	Lead Capacity
3.64 kgs	495 x 117 x 376 mm	5-7 kg / cm ²	60 nails
8 lbs	19.5" x 4.6" x 14.8"	70 - 100 psi	60 nails

APACH INDUSTRIAL CO., LTD.

www.apach.com.tw

US Distributor: Axxis

www.axxisus.com Tel. 888-392-9947

