


# L2190

## Framing Nailers

21 Degree Strip Framing Nailer



L2190

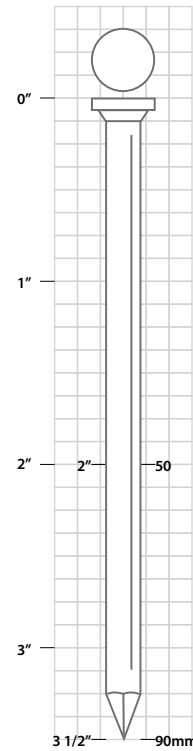

### Features

- 360° Adjustable Air Deflector
- Depth-Of-Drive Adjustment
- Toe-Nailing Teeth For Slip-Free Grip
- No-Mar Rubber Pad
- Sequential Fire Trigger Available (#30805301A)

### Applications

- Framing
- Sub flooring
- Sheathing
- Crating

### Fasteners

- 21° Full Head Plastic Collated Strip Nails
- Ø .122 - .161" / 3.1 - 4.1 mm

### Tool Specifications

Weight	Dimensions (L x W x H)	Operating Pressure	Lead Capacity
3.65 kgs	465 x 115 x 370 mm	5-7 kg / cm <sup>2</sup>	60 nails
8 lbs	18.3" x 4.5" x 14.6"	70 - 100 psi	60 nails

APACH INDUSTRIAL CO., LTD.

[www.apach.com.tw](http://www.apach.com.tw)

US Distributor: Axxis

[www.axxisus.com](http://www.axxisus.com) Tel. 888-392-9947

